


E-Z DRILL

International: +1 (405) 372-0121
Toll Free: (800) 272-0121
Email: sales@ezdrill.com

Specifications

Model 210-4 EQ MT

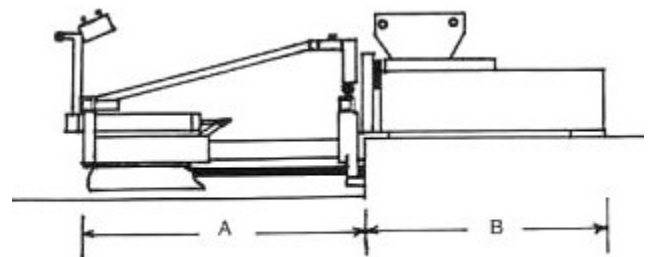

Horizontal Position	
Drill Depth	18" (45.7 cm)
Drill Depth w/ Dust Collection Kit	15 3/4" (40.0 cm)
Drill Bit Diameter	5/8" to 2 1/2" (15.9 mm to 63.5 mm)
Air Consumption (minimum)	400 cfm (11.3 m3/min)
Air Consumption w/ Dust Collection Kit (minimum)	400 cfm (11.3 m3/min)
Minimum Hose Size (ID)	2" (50.8 mm)
Operating Pressure at Drill Motor	90 psi (6.2 bar)
Drill Distance from Corner	6" (15.2 cm)
Drill Distance from Ground	3" (7.6 cm)
Length (A)	47" (119.4 cm)
Length (A) w/ Dust Collection Kit	49 1/2" (125.7 cm)
Frame Length (B)	44" (111.8 cm)
Width	47" (119.4 cm)
Height	35" (88.9 cm)
Minimum Patch Size @ ⊗ 3"-15" Below Top of Slab	48" (121.9 cm)
Minimum Patch Size w/ Dust Collection Kit @ ⊗ 3"-15" Below Top of Slab	51" (129.5 cm)
Weight	2050 lbs. (929.9 kg)
Drill Motor (pneumatic)	CP 32A
Drill Motor Weight	54 lbs. (24.5 kg)
Chuck Size	7/8" x 3 1/4" (22.2 mm x 82.6 mm)
Impact (ft. lbs./blow)	36 fpb (48.8 J)
Blows/minute	2200 bpm
Rotations/minute	288 rpm

⊗ - Center of Hole

Specifications are subject to change without notice