


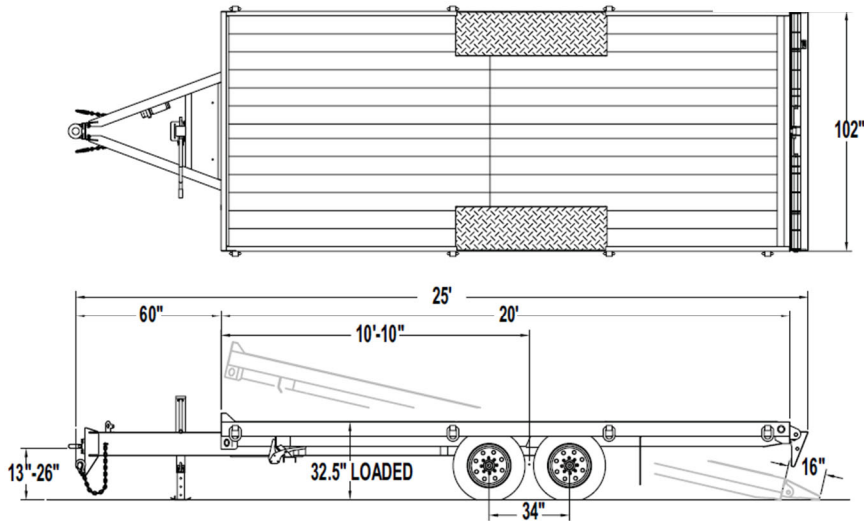

All dimensions are nominal. Illustration may be shown with optional equipment.

Standard Features

Hitch/Tongue

- Adjustable Height Hitch with Bolt-on Coupler
- 3" Pintle
- 7-Pole Round Electrical Plug
- One-Piece Cold-Formed I-Beam Frame Rails
- Integrated Storage Tray (Lockable Lid Optional)
- 12K Bolt-On, Side-Wind, Parking Jack
- Battery Break-Away Kit with Tow Charger and Test Light
- Safety Chains with Hooks

Frame/Deck

- 102" Load Width
- 32.5" Deck Height (Fully Loaded)
- 20' Tilt-Deck (A Stationary Deck is Optional)
- Tilt Cushion Deck Cylinder
- Dual-Point, Single Lever Deck Lock
- 10" I-Beam Main Frame
- 3" Jr. I-Beam Crossmembers
- 2" Nominal White Oak Deck
- D-Ring Tie-Downs (4 Per Side)

Tail/Approach

- 16" (20°) Approach Ramp Doubles as Under-Ride Protection
- Tilt Deck Load Angle: 14.5°

Axles/Suspension

- Rubber-Ride Torsion Suspension Axles
- (2) 8,000 lb. Axles (4 Wheels)
- Tires -215/75R17.5 Load Range H, 16-Ply
- 17.5" Wheels, 8-Bolt
- Electric Brakes
- Forward Adjusting Brakes
- Oil Bath Hubs
- 34" Axle Spacing

Lights/Wiring

- Rubber Grommet Mounted LED Lights
- Sealed Modular Wiring Harness

Standard Features

- Limited Lifetime Frame Warranty-10 years
- One-Year Full Warranty
- 10 Year Suspension Warranty
- Weatherproof Registration Holder
- Two-Component Polyurethane Primer and Paint
- Trailer Color: Equipment Black

GAWR (lbs.)	GVWR (lbs.)	Weight (lbs.)	Capacity (lbs.)	Deck Width (in.)	Deck Length (ft.)
16,000	21,280	5,280	16,000	102"	20'

Other Options May Be Available. Ask Your Dealer or Visit our Website.

Listed GVWR, weight and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our website or your local authorized dealer for more information.

Towmaster.com 800-462-4517

Options

TONGUE/HITCH

2-5/16" Ball Coupler (25K Capacity)

6-Pole Round Electrical

7-Pole Round Electrical

12k Electric Over Hydraulic Jack with Battery

12k Spring Foot Jack

25k Two-Speed Jack

Lockable Storage Tray Lid (Storage Tray Standard)

Mesh in A-Frame of Tongue

A-Frame Gooseneck (2-5/16" coupler) 84" swing clearance, 39" hitch height/truck bed height (please call if your measurement is different). A toolbox, toolbox lid and dual 12k jacks are included.

Spare Tire Mount on A-Frame Gooseneck (Spare Tire Sold Separately)

A-Frame Gooseneck Toolbox (lockable) Mounted Between the Gooseneck Uprights, Includes a Chain Bar

MAIN DECK/BEAVERTAIL

4' Stationary Deck with White Oak Decking (Adds approximately 400 lbs. to GVWR)

5' Stationary Deck with White Oak Decking (Adds approximately 500 lbs. to GVWR)

6' Stationary Deck with White Oak Decking (Adds approximately 600 lbs. to GVWR)

8' Stationary Deck with White Oak Decking—Max Capacity 2,000 lbs. (Adds approximately 700 lbs. to GVWR)

Apitong Wood Decking Upgrade

3/16" Diamond Plate Steel Decking, Crossmembers 12" on Center

Additional D-Ring Tie-Downs

Rub Rail and Stake Pockets in Lieu of D-Rings

Additional Stake Pockets

Tilt Deck Power Up and Power Down, Includes Battery Kit

SUSPENSION/TIRES AND WHEELS

Hubodometer-Mounts on Wheel to Measure Distance Traveled

Spare Tire Mounting Bracket Mounted Flat on Tongue

Spare Tire and Wheel 215/75R17.5 Load Range "H"

SUSPENSION/TIRES AND WHEELS

8K Electric Winch with 95 Feet of 5/16" Cable, Winch is Mounted On Deck Side of Headboard, Includes Battery with Charger

Trailer Color Options: See Standard Color Chart

Galvanizing-(Please Call for Current Cost)

Custom Paint Color: Market Price (Please Call for Cost)

Two Chock Block Holders (Mounted Under the Deck Ahead of the Axles)