


Deck-Over Tilt T-30T

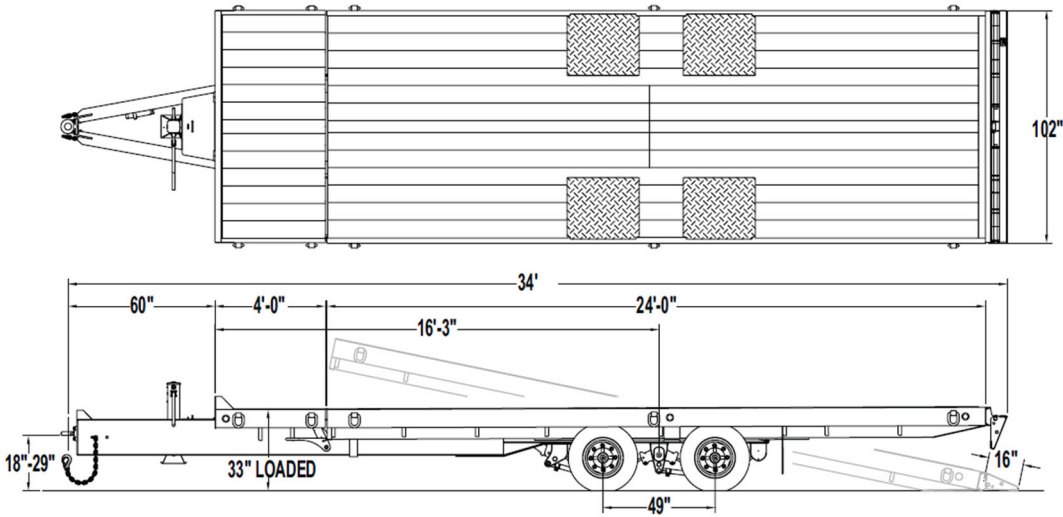

All dimensions are nominal. Illustration may be shown with optional equipment.

Standard Features

Hitch/Tongue

- Adjustable Height Hitch with Bolt-on Coupler
- 3" Pintle
- 7-Pole Round Electrical Plug
- One-Piece Cold-Formed I-Beam Frame Rails
- Integrated Storage Tray with Lockable Lid
- 25K Bolt-On, Two-Speed Parking Jack
- Battery Break-Away Kit with Tow Charger and Test Light
- Safety Chains with Hooks

Frame/Deck

- 102" Load Width
- 33" Deck Height (Fully Loaded)
- 24' Tilt-Deck, 4' Stationary Deck
- Tilt Deck Cushion Cylinder
- Dual-Point, Single Lever Deck Lock
- 16" I-Beam Main Frame
- 3" Jr. I-Beam Crossmembers
- 2" Nominal White Oak Deck
- D-Ring Tie-Downs (5 Per Side)

Tail/Approach

- 16" (20°) Approach Ramp Doubles as Under-Ride Protection
- Tilt Deck Load Angle: 12°

Axles/Suspension

- Huchens 9700 Adjustable Suspension
- (2) 16,000 lb. Axles (8 Wheels)
- Tires -215/75R17.5 Load Range H, 16-Ply
- 17.5" Hub Piloted Wheels, 8-Bolt
- Electric Brakes
- Brake Size (12.25x7.5)
- Oil Bath Hubs
- 49" Axle Spacing
- Auto Slack Adjusters

Lights/Wiring

- Rubber Grommet Mounted LED Lights
- Sealed Modular Wiring Harness

Standard Features

- Limited Lifetime Frame Warranty-10 years
- One-Year Full Warranty
- 5 Year Suspension Warranty
- Weatherproof Registration Holder
- Two-Component Polyurethane Primer and Paint
- Trailer Color: Equipment Black

GAWR (lbs.)	GVWR (lbs.)	Weight (lbs.)	Capacity (lbs.)	Deck Width (in.)	Deck Length (ft.)
-------------	-------------	---------------	-----------------	------------------	-------------------

30,000	39,660	9,660	30,000	102"	24'
--------	--------	-------	--------	------	-----

Other Options May Be Available. Ask Your Dealer or Visit our Website.

Listed GVWR, weight and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our website or your local authorized dealer for more information.

Towmaster.com 800-462-4517

Options	T-20T	T-24T	T-30T	T-40T	T-50T
TONGUE/HITCH					
6' Tongue Length in Lieu of Standard 5' Tongue	•	•	•	•	•
7' Tongue Length in Lieu of Standard 5' Tongue	•	•	•	•	•
7-Pole RV Electrical Plug	•	•			
6-Pole Round Electrical Plug		•	•		
12k Spring Foot Jack	•	•			
Dual 12k Parking Jacks	•	•			
25k Two-Speed Parking Jacks	•	•			
25k Electric Jack with Battery			•	•	•
Dual 25k Two-Speed Parking Jacks	•	•			
Dual 25k Two-Speed Parking Jacks			•	•	•
Mesh in A-Frame of Tongue	•	•	•	•	•
A-Frame Gooseneck (2-5/16" coupler) 84" swing clearance, 39" hitch height/truck bed height (please call if your measurement is different). A toolbox, toolbox lid and dual 12k jacks are included.	•	•			
A-Frame Gooseneck (3" coupler) 84" swing clearance, 39" hitch height/truck bed height (please call if your measurement is different). A toolbox, toolbox lid and dual 12k jacks are included.			•		
Rigid Gooseneck (King-Pin) 84" Swing Clearance, 39" King-Pin Height (Fifth Wheel Height-Please Call if your Measurement is Different) 10' Long Top Deck (White Oak Wood Standard)	•	•	•	•	•
Spare Tire Mount on A-Frame Gooseneck (Spare Tire Sold Separately)	•	•	•		
A-Frame Gooseneck Toolbox (Lockable) Mounted Between the Gooseneck Uprights, Includes Chain Bar	•	•	•		
MAIN DECK					
Tilt Deck Power Up and Down, Includes Battery Kit	•	•	•	•	•
5' Stationary Deck with White Oak Decking	•	•	•	•	
6' Stationary Deck with White Oak Decking	•	•	•	•	
8' Stationary Deck with White Oak Decking	•	•	•	•	•
10' Stationary Deck with White Oak Decking			•	•	•
Apitong Wood Decking Upgrade	•	•	•	•	•
3/16" Diamond Plate Steel Decking, Crossmembers 12" On-Center	•	•	•	•	•
Additional D-Rings Tie-Downs	•	•	•	•	•
Rub Rail and Stake Pockets in Lieu of D-Rings	•	•	•	•	•
Additional Stake Pockets	•	•	•	•	•
Sliding Winch Track-Mounted on Curbside of The Deck—Winches Sold Separately	•	•	•	•	•
4" Sliding Winch for Use with Sliding Winch Track	•	•	•	•	•
4" Weld-On Winch-Mounted on Curbside-Cargo Straps Sold Separately	•	•	•	•	•
4"x 30' Winch Strap with Flat Hook	•	•	•	•	•
Trailer Step-Please Specify Location	•	•	•	•	•

Options	T-20T	T-24T	T-30T	T-40T	T-50T
SUSPENSION/TIRE AND WHEELS					
Hubodometer-Mounts on Wheel to Measure Distance Traveled	•	•	•	•	•
Hutchens 9700 Adjustable Suspension	•	•			
25k Oil bath, Air Ride Suspension with 49" Axle Spread in Lieu of Spring Suspension				•	
25k Oil Bath, Air Ride Suspension with 49" Axle Spread in Lieu of Spring Suspension					•
Air Lift First Axle (Requires Air Suspension on First Axle Minimum)					•
Electric over Hydraulic Drum Brakes			•		
4S/2M Two-Axle Anti-Lock Braking System-Four Wheel Sensors and Two ABS Relay Valves	•	•		•	•
6S/3M Three-Axle Anti-Lock Braking System-Six Wheel Sensors and Three ABS Relay Valves					•
Polished Aluminum Wheels-8-Bolt, Hub Piloted	•	•	•	•	•
235/85R16 Load Range "G" 14-Ply Upgrade in Lieu of "F" 12-Ply (8 Tires)	•	•			
235/85R17.5 Load Range "H" 16-Ply Tires in Lieu of Standard 215/75R17.5 (8 Tires)			•		
235/75R17.5 Load Range "H" 16-Ply Tires in Lieu of Standard 215/75R17.5 (12 Tires)					•
Spare Tire Mounting Bracket Mounted Flat on the Tongue	•	•	•	•	•
Spare Tire Mounting Bracket Mounted Under the Deck (Lockable)	•	•	•	•	•
Spare Tire and Wheel 235/85R16 Load Range "F" 12-Ply	•	•			
Spare Tire and Wheel 235/85R16 Load Range "G" 14-Ply	•	•			
Spare Tire and Wheel 215/75R17.5 Load Range "H" 16-Ply			•		•
Spare Tire and Wheel 235/75R17.5 Load Range "J" 18-Ply			•	•	•
PAINT/ELECTRICAL/OTHER					
12k Electric Winch with 125 Feet of 3/8" Cable, Corded Remote, and Wired to the Tongue of the Trailer	•	•	•	•	•
Battery Kit with Charger for Electric Winch	•	•	•	•	•
Trailer Color Options: See Standard Color Chart	•	•	•	•	•
Galvanizing-(Please Call for Current Cost)	•	•	•	•	•
Custom Paint Color: Market Price (Please Call for Cost)	•	•	•	•	•
Two Chock Block with Holders (Mounted Under the Deck Ahead of Axles)	•	•	•	•	•
Pogo Stick- Prevents Air Hoses and Wiring from Dangling or Dragging	•	•	•	•	•
Mid-Ship Turn Signal/Side Marker Lights (Pair)	•	•	•	•	•