


Drop-Over Tilt T-50TA



a brand of aebe schmidt

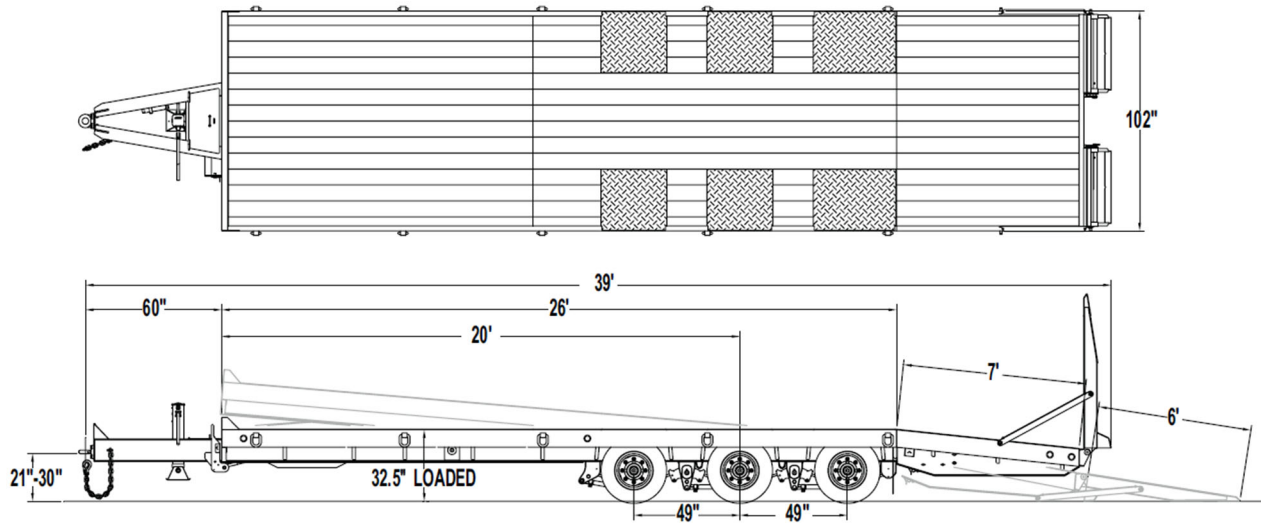

All dimensions are nominal. Illustration may be shown with optional equipment.

Standard Features

Hitch/Tongue

- Adjustable Height Hitch with Bolt-on Coupler
- 3" Pintle
- 7-Pole Round Electrical Plug
- One-Piece Cold-Formed I-Beam Frame Rails
- Integrated Storage Tray with Lockable Lid
- 25K Bolt-On, Two-Speed Parking Jack
- Safety Chains with Hooks

Frame/Deck

- 102" Load Width
- 31.5" Deck Height (Fully Loaded)
- 26' Main Deck Length, 7' Beavertail
- Dual Air Bags
- Dual-Point, Single Lever Deck Lock
- 10" I-Beam Main Frame
- 3" Jr. I-Beam Crossmembers
- 2" Nominal White Oak Deck
- D-Ring Tie-Downs (5 Per Side)

Ramps/Tail

- 6'x 36" Wood-Topped Air-Ramps (10° Load Angle)
- 12° Beavertail

Axles/Suspension

- Huchens 9700 Adjustable Suspension
- (3) 25,000 lb. Axles (12 Wheels)
- Tires -215/75R17.5 Load Range H, 16-Ply
- 17.5" Hub Piloted Wheels, 8-Bolt
- Air Brakes (2S/1M)
- Full ABS
- Brake Size (12.25 x 7.5)
- Oil Bath Hubs
- 49" Axle Spacing
- Auto Slack Adjusters

Lights/Wiring

- Rubber Grommet Mounted LED Lights
- Sealed Modular Wiring Harness

Standard Features

- Limited Lifetime Frame Warranty-10 years
- One-Year Full Warranty
- 5 Year Suspension Warranty
- Weatherproof Registration Holder
- Two-Component Polyurethane Primer and Paint
- Trailer Color: Equipment Black
- Ramp Color: Equipment Black

GAWR (lbs.)	GVWR (lbs.)	Weight (lbs.)	Capacity (lbs.)	Deck Width (in.)	Deck Length (in.)
-------------	-------------	---------------	-----------------	------------------	-------------------

54,480

63,270

13,270

50,000

102"

26'

Other Options May Be Available. Ask Your Dealer or Visit our Website.

Listed GVWR, weight and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our website or your local authorized dealer for more information.

Towmaster.com 800-462-4517

Options	T-401A	T-501A
TONGUE/HITCH		
25k Electric Jack with Battery	•	•
Mesh in A-Frame of Tongue	•	•
MAINDECK/BEAVERTAIL		
Apitong Wood Decking Upgrade	•	•
3/16" Diamond Plate Steel Decking, Side-Rails Turned Out/Crossmembers 12" On-Center	•	•
Additional D-Ring Tie-Downs	•	•
Rub Rail and Stake Pocket in Lieu of D-Rings	•	•
Additional Stake Pockets	•	•
Trailer Step-Please Specify Location	•	•
SUSPENSION/TIRE AND WHEELS		
Hubodometer-Mount on Wheel to Measure Distance Traveled	•	•
25k Oil bath, Air Ride Suspension with 49" Axle Spread in Lieu of Spring Suspension	•	
25k Oil Bath, Air Ride Suspension with 49" Axle Spread in Lieu of Spring Suspension		•
4S/2M Two-Axle Anti-Lock Braking System-Four Wheel Sensors and Two ABS Relay Valves	•	•
6S/3M Three-Axle Anti-Lock Braking System-Six Wheel Sensors and Three ABS Relay Valves		•
Polished Aluminum Wheels-8-Bolt, Hub Piloted	•	•
235/75R17.5 Load Range "J" 18-Ply Tires in Lieu of Standard 215/75R17.5 Load Range "H" Tires		•
Spare Tire Mounting Bracket Mounted Flat on the Tongue	•	•
Spare Tire and Wheel 215/75R17.5 Load Range "H" 16-Ply		•
Spare Tire and Wheel 235/75R17.5 Load Range "J" 18-Ply	•	•
PAINT/ELECTRICAL/OTHER		
12k Electric Winch with 125 Feet of 3/8" Cable, Corded Remote, and Wired to the Tongue of the Trailer	•	•
Battery Kit with Charger for Electric Winch	•	•
Trailer Color Options: See Standard Color Chart	•	•
Galvanizing-(Please Call for Current Cost)	•	•
Custom Paint Color: Market Price (Please Call for Cost)	•	•
Two Chock Block with Holders (Mounted Under the Deck Ahead of Axles)	•	•
Pogo Stick- Prevents Air Hoses and Wiring from Dangling or Dragging	•	•
Mid-Ship Turn Signal/Side Marker Lights (Pair)	•	•