


Deck-Over T-16LP

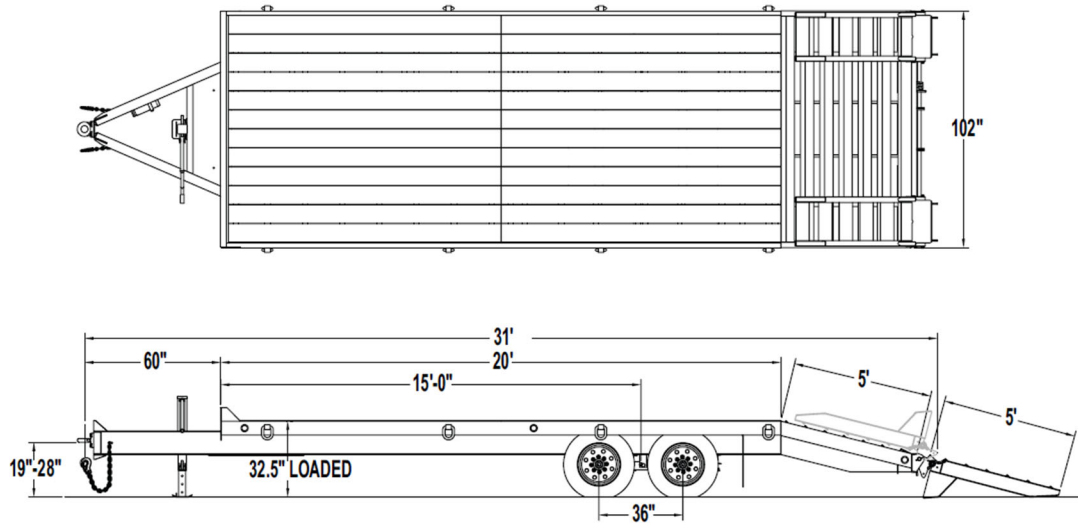

All dimensions are nominal. Illustration may be shown with optional equipment.

Standard Features

Hitch/Tongue

- Adjustable Height Hitch with Bolt-on Coupler
- 3" Pintle
- 7-Pole Round Electrical Plug
- One-Piece Cold-Formed I-Beam Frame Rails
- Integrated Storage Tray (Lockable Lid Optional)
- 12K Bolt-On, Two-Speed Parking Jack
- Safety Chains with Hooks

Frame/Deck

- 102" Load Width
- 32.5" Deck Height (Fully Loaded)
- 20' Main Deck Length
- 10" I-Beam Main Frame
- 3" Jr. I-Beam Crossmembers
- 2" Nominal White Oak Deck
- D-Ring Tie-Downs (4 Per Side)

Ramps/Tail

- 5' Angle-Iron Beavertail (14° Load Angle)
- 5' x 21" Ladder Style Angle Iron Cleated Ramps (14° Load Angle)
- One-Way Spring-Assist Ramps

Axles/Suspension

- Slipper Spring Suspension
- (2) 8,000 lb. Axles (4 Wheels)
- Tires -215/75R17.5 Load Range H, 16-Ply
- 17.5" Wheels, 8-Bolt
- Electric Brakes
- Forward Self-Adjusting Brakes
- E-Z Lube Hubs
- 36" Axle Spacing

Lights/Wiring

- Rubber Grommet Mounted LED Lights
- Sealed Modular Wiring Harness

Standard Features

- Limited Lifetime Frame Warranty-10 years
- One-Year Full Warranty
- 5 Year Suspension Warranty
- Weatherproof Registration Holder
- Two-Component Polyurethane Primer and Paint
- Trailer Color: Equipment Black
- Ramp Color: Equipment Red

GAWR (lbs.)	GVWR (lbs.)	Weight (lbs.)	Capacity (lbs.)	Deck Width (in.)	Deck Length (ft.)
16,000	21,960	5,960	16,000	102"	20'

Other Options May Be Available. Ask Your Dealer or Visit our Website.

Listed GVWR, weight and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our website or your local authorized dealer for more information.

Towmaster.com 800-462-4517

Options
TONGUE/HITCH
6' Tongue Length in Lieu of Standard 5' Tongue
7' Tongue Length in Lieu of Standard 5' Tongue
2-5/16" Ball Coupler (25k Capacity)
7-Pole RV Electrical Plug
6-Pole Round Electrical Plug
12k Spring Foot Jack
Dual 12k Parking Jacks
12k Electric Jack with Battery
Dual 12k Electric Jack with Battery
25k Two-Speed Park Jack (In Lieu of Standard 12k Jack)
25k Electric Jack with Battery
Dual 25k Two-Speed Parking Jacks
Lockable Storage Tray Lid (Storage Tray Standard)
Mesh in A-Frame of Tongue
A-Frame Gooseneck (2-5/16" coupler) 84" swing clearance, 39" hitch height/truck bed height (please call if your measurement is different). A toolbox, toolbox lid and dual 12k jacks are included.
8' x 5' Rack on Gooseneck-Mesh Platform
8' x 5' Rack on Gooseneck-Wood Platform
Spare Tire Mount on A-Frame Gooseneck (Spare Tire Sold Separately)
A-Frame Gooseneck Toolbox (Lockable) Mounted Between the Gooseneck Uprights, Includes a Chain Bar
MAIN DECK/BEAVERTAIL
Up to 4' of Additional Deck Length, Please Call for Additional Deck Length over 4'
Apitong Wood Decking Upgrade
3/16" Diamond Plate Steel Decking, Side-Rails Turned Out/Crossmembers 12" On-Center
Additional D-Ring Tie-Downs
Rub Rail and Stake Pocket in Lieu of D-Rings
Additional Stake Pockets
Sliding Winch Track Mounted on Curbside of the Deck-Winches Sold Separately
4" Sliding Winch for Use with Sliding Winch Track
4" Weld-On Winch-Mounted on Curbside-Cargo Straps Sold Separately
4"x30' Winch Strap with Flat Hook
Trailer Step-Please Specify Location
5' Wood Topped Beavertail in Lieu of Standard 5' Angle Iron Beavertail
5'-6" Wedge Ramp Beavertail Angle Iron, (Must Be Used with Wedge Style Ramp Option Only)
6' Angle Iron Beavertail
6' Wood Topped Beavertail
Bobtail-No Beavertail
Bucket Well in Beavertail

Options
SUSPENSION/TIRES AND WHEELS
Hubodometer-Mounts on Wheel to Measure Distance Traveled
8k Oil Bath Hubs in Lieu of Standard 8k EZ-Lube Hubs
Polished Aluminum Wheels-8 Bolt, Hub Piloted
235/75R17.5 Load Range "J" 18-Ply Tires in Lieu of Standard 215/75R17.5 Load Range "H" Tires
Spare Tire Mounting Bracket Mounted Flat on the Tongue
Spare Tire and wheel 215/75R17.5 Load Range "H" 16-Ply
Spare Tire and Wheel 235/75R17.5 Load Range "J" 18-Ply
RAMPS
Full Width Ramp Rod
Two-Way Spring Assist on Ramps
5' Stand-Up Angle Iron Ramps with Flat Bar Hold-Ups
5' Long x Full Width of Deck Ramps-Two 5' ramps Made of Expanded Metal with Flat Bar Hold-Ups (Spring Assist Included)
5'-6" Wedge Ramp Beavertail-Angle Iron (Must be Used with Wedge Style Ramp Option Only)
4'-6" Angle Iron Wedge Ramps (Pair)
6' Angle Iron Ramps with Flat Bar Hold-Ups (In Lieu of Standard 5' Ramps)
6' Wood Topped Ramps with Flat Bar Hold-Ups (In Lieu of Standard 5' Ramps)
PAINT/ELECTRICAL/OTHER
8k Electric Winch with 60 Feet 3/8" Cable, Corded Remote, and Wired to the Tongue of the Trailer
Battery Kit with Charger for Electric Winch
Trailer Color Options: See Standard Color Chart
Galvanizing-(Please Call for Current Cost)
Custom Paint Color: Market Price (Please Call for Cost)
Change Ramp Color from Red to Yellow, or Blue or Charcoal (No Charge for Black)
Two Chock Blocks with Holders (Mounted Under the Deck Ahead of Axles)
Pogo Stick-Prevents Air Hoses and Wiring from Dangling or Dragging
Mid-Ship Turn Signal/Side Marker Lights (Pair)