


Deck-Over T-24LP

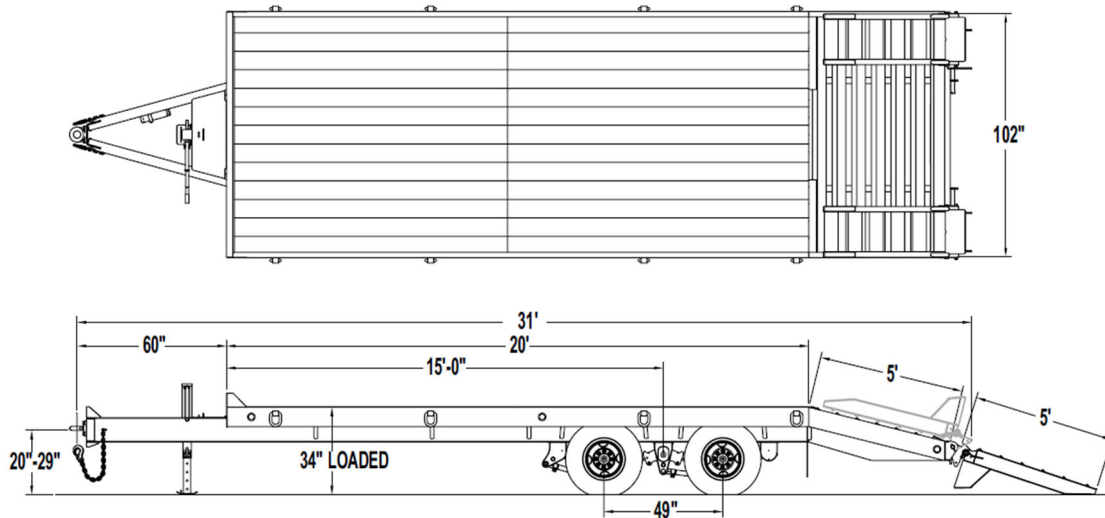

All dimensions are nominal. Illustration may be shown with optional equipment.

Standard Features

Hitch/Tongue

- Adjustable Height Hitch with Bolt-on Coupler
- 3" Pintle
- 7-Pole Round Electrical Plug
- One-Piece Cold-Formed I-Beam Frame Rails
- Integrated Storage Tray with Lockable Lid
- 12K Bolt-On, Side Wind, Drop-Leg Parking Jack
- Safety Chains with Hooks

Frame/Deck

- 102" Load Width
- 34" Deck Height (Fully Loaded)
- 20' Main Deck Length
- 10" I-Beam Main Frame
- 3" Jr. I-Beam Crossmembers
- 2" Nominal White Oak Deck
- D-Ring Tie-Downs (4 Per Side)

Ramps/Tail

- 5' Steel Angle-Iron Beavertail (14° Load Angle)
- 5' x 21" Ladder Style Angle Iron Cleated Ramps (14° Load Angle)
- Two-Way Spring-Assist Ramps
- Beavertail to Deck Transition Wood Protectors

Axles/Suspension

- Hutchens 9700 Adjustable Suspension
- (2) 12,000 lb. Axles (8 Wheels)
- Tires -235/85R16 Load Range F, 12-Ply
- 16" Wheels, 8-Bolt
- Electric or Air Brakes (Air: 2S/1M)
- Full ABS
- Oil Bath Hubs
- 49" Axle Spacing

Lights/Wiring

- Rubber Grommet Mounted LED Lights
- Sealed Modular Wiring Harness

Standard Features

- Limited Lifetime Frame Warranty-10 years
- One-Year Full Warranty
- 5 Year Suspension Warranty
- Weatherproof Registration Holder
- Two-Component Polyurethane Primer and Paint
- Trailer Color: Equipment Black
- Ramp Color: Equipment Red

GAWR (lbs.)	GVWR (lbs.)	Weight (lbs.)	Capacity (lbs.)	Deck Width (in.)	Deck Length (ft.)
24,000	30,900	6,900	24,000	102"	20' Elec
24,000	30,900	6,900	24,000	102"	20' Air

Other Options May Be Available. Ask Your Dealer or Visit our Website.

Listed GVWR, weight and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our website or your local authorized dealer for more information.

Towmaster.com 800-462-4517

Options	T-20LP	T-24LP	T-30LP
TONGUE/HITCH			
6' Tongue Length in Lieu of Standard 5' Tongue	•	•	•
7' Tongue Length in Lieu of Standard 5' Tongue	•	•	•
2-5/16" Ball Coupler (25k Capacity)	•	•	•
6-Pole Round Electrical Plug	•	•	•
7-Pole RV Electrical Plug	•	•	•
12k Spring Foot Jack	•	•	•
Dual 12k Parking Jacks (Additional 12k Jack on T-20LP & T-24LP)	•	•	
12k Electric Jack with Battery	•	•	
25k Two-Speed Parking Jack in (Lieu of Standard 12k Jack)	•	•	
25k Electric Jack with Battery	•	•	•
Dual 25k Two-Speed Parking Jacks (T-20LP & T-24LP)	•	•	
Dual 25k Two-Speed Parking Jacks (Additional 25k Jack on T-30LP)			•
Mesh in A-Frame of Tongue	•	•	•
A-Frame Gooseneck (2-5/16" coupler) 84" swing clearance, 39" hitch height/truck bed height (please call if your measurement is different). A toolbox, toolbox lid and dual 12k jacks are included.	•	•	
A-Frame Gooseneck (3" coupler) 84" swing clearance, 39" hitch height/truck bed height (please call if your measurement is different). A toolbox, toolbox lid and dual 12k jacks are included.			•
Rigid Gooseneck (King-Pin) 84" Swing Clearance, 39" King-Pin Height (Fifth Wheel Height-Please Call if your Measurement is Different) 10' Long Top Deck (White Oak Wood Standard)	•	•	•
8' x 5' Rack on Gooseneck-Mesh Platform	•	•	•
8' x 5' Rack on Gooseneck-Wood Platform	•	•	•
Spare Tire Mount on A-Frame Gooseneck (Spare Tire Sold Separately)	•	•	•
A-Frame Gooseneck Toolbox (Lockable) Mounted Between the Gooseneck Uprights, Includes a Chain Bar	•	•	•
MAIN DECK/BEAVERTAIL			
Up to 4' of Additional Deck Length, Please Call for Additional Deck Length Over 4'	•	•	•
9' Wide Deck and Beavertail	•	•	
9' Wide Deck and Beavertail			•
Apitong Wood Decking Upgrade	•	•	•
3/16" Diamond Steel Plate Decking, Crossmembers 12' On-Center	•	•	•
Additional D-Ring Tie-Downs	•	•	•
Rub Rail and Stake Pockets in Lieu of D-Rings	•	•	•
Additional Stake Pockets	•	•	•
Sliding Winch Track-Mounted on Curbside of the Deck-Winches Sold Separated	•	•	•
4' Sliding Winch Strap with Flat Hook	•	•	•
4" Weld-On Winch-Mounted on Curbside-Cargo Straps Sold Separately	•	•	•
4"x30' Winch Strap with Flat Hook	•	•	•
Trailer Step-Please Specify Location	•	•	•
5' Wood Topped Beavertail in Lieu of Standard 5' Angle Iron Beaver Tail	•	•	•
5'-6" Wedge Ramp Beavertail Angle Iron, (Must Be Used with Wedge Style Ramp Option Only)	•	•	•

Options	T-20LP	T-24LP	T-30LP
MAIN DECK/BEAVERTAIL CONTINUED			
6' Angle Iron Beavertail	•	•	•
6' Wood Topped Beavertail	•	•	•
7'-6" Double Brake Beavertail-Angle Iron, Option Comes with 6' Angle Iron Ramps Standard (12 Degree to 6 Degree to Deck Load Angle Transition)	•	•	•
7'-6" Double Brake Beavertail-Wood Topped, Option Comes with 6' Angle Iron Ramps Standard (12 Degree to 6 Degree to Deck Load Angle Transition)	•	•	•
Bobtail-No Beavertail	•	•	•
Bucket Well in Beavertail	•	•	•
SUSPENSION/TIRES AND WHEELS			
Hub Odometer-Mounts on Wheel to Measure Distance Traveled	•	•	•
4S/2M Two-Axle Anti-Lock Braking System-Four Wheel Sensors and Two ABS Relay Valves	•	•	
Polished Aluminum Wheels-8 Bolt, Hub Piloted	•	•	•
235/85R16 Load Range "G" 14-Ply Upgrade (In Lieu of "F")			•
235/75R17.5 Load Range "J" 18-Ply Tires in Lieu of Standard 215/75R17.5 Load Range "H" Tires	•	•	•
Spare Tire Mounting Bracket Mounted Flat on the Tongue	•	•	•
Spare Tire and Wheel 235/85R16 Load Range "F" 12-Ply	•	•	•
Spare Tire and Wheel 235/85R16 Load Range "G" 14-Ply	•	•	•
Spare Tire and wheel 215/75R17.5 Load Range "H" 16-Ply	•	•	•
Spare Tire and Wheel 235/75R17.5 Load Range "J" 18-Ply	•	•	•
RAMPS			
Third Ramp (Requires the Full Width Ramp Rod Option)	•	•	•
Full Width Ramp Rod	•	•	•
4'-6" Angle Iron Wedge Ramps (Pair)	•	•	•
6' Wood Topped Ramps in Lieu of Standard 6' Angle Iron Ramps in Double Break Beavertail Option (Pair)	•	•	•
6' x 36" Air Ramps-Angle Iron (Paid)	•	•	•
6' x 36" Air Ramps-Wood Topped (Pair)	•	•	•
6' x 36" Electric/Hydraulic Ramps-Angle Iron (Air)	•	•	•
6' x 36" Electric/Hydraulic Ramps-Wood Topped (Pair)	•	•	•
Bi-Fold Electric/Hydraulic Ramp 11' in Length and 102" Wide, Wood Topped and Provides a 9 Degree to 8 Degree to Deck Load Angle Transition (Requires a 26' Deck Minimum and the 6' Wood Topped Beavertail Option)		•	•
PAINT/ELECTRICAL/OTHER			
12K Electric Winch with 125 Feet of 3/8" Cable, Corded Remote, and Wired to the Tongue of the Trailer	•	•	•
Battery Kit with Charger for Electric Winch	•	•	•
Trailer Color Options: See Standard Color Chart	•	•	•
Galvanizing-(Please Call for Current Cost)	•	•	•
Custom Paint Color: Market Price (Please Call for Cost)	•	•	•

Options	T-40LP	T-50LP
TONGUE/HITCH		
6' Tongue Length in Lieu of Standard 5' Tongue	•	•
7' Tongue Length in Lieu of Standard 5' Tongue	•	•
7-Pole Round Electrical Plug	•	•
25k Electric Jack with Battery	•	•
Dual 25k Two-Speed Parking Jacks	•	•
Mesh in A-Frame of Tongue	•	•
Rigid Gooseneck (King-Pin) (84" Swing Clearance, 39" King-Pin Height/Fifth Wheel Height, Please Call if Your Measurement is Different) 10' Long Top Deck (White Oak Wood Standard)	•	•
MAIN DECK/BEAVERTAIL		
Up to 4' of Additional Deck Length, Please Call for Additional Deck Length Over 4'	•	•
9' Wide Deck and Beavertail	•	
9' Wide Deck and Beavertail		•
Apitong Wood Decking Upgrade	•	•
3/16" Diamond Steel Plate Decking, Crossmembers 12" On-Center	•	•
Additional D-Ring Tie-Downs	•	•
Rub Rail and Stake Pockets in Lieu of D-Rings	•	•
Additional Stake Pockets	•	•
Sliding Winch Track-Mounted on Curbside of the Deck-Winches Sold Separated	•	•
4" Sliding Winch Strap with Flat Hook	•	•
4" Weld-On Winch-Mounted on Curbside-Cargo Straps Sold Separately	•	•
4"x30' Winch Strap with Flat Hook	•	•
Trailer Step-Please Specify Location	•	•
5' Wood Topped Beavertail in Lieu of Standard 5' Angle Iron Beavertail	•	•
5'-6" Wedge Ramp Beavertail Angle Iron, (Must Be Used with Wedge Style Ramp Option Only)	•	•
6' Angle Iron Beavertail	•	•
6' Wood Topped Beavertail	•	•
7'-6" Double Brake Beavertail-Angle Iron, Option Comes with 6' Angle Iron Ramps Standard (12 Degree to 6 Degree to Deck Load Angle Transition)	•	•
7'-6" Double Brake Beavertail-Wood Topped, Option Comes with 6' Angle Iron Ramps Standard (12 Degree to 6 Degree to Deck Load Angle Transition)	•	•
Bobtail-No Beavertail	•	•
Bucket Well in Beavertail	•	•
Bucket Well in Beavertail with a Steel Plate in the Bottom of the Bucket Well	•	•
SUSPENSION/TIRES AND WHEELS		
Hubodometer-Mounts on Wheel to Measure Distance Traveled	•	•
25k Oil Bath, Spring Ride Suspension with 55" Axle Spread		•
25k Oil Bath, Spring Ride Suspension with 60" Axle Spread		•
25k Oil Bath, Air Ride Suspension with 49" Axle Spread in Lieu of Spring Suspension	•	
25k Oil Bath, Air Ride Suspension with 49" Axle Spread in Lieu of Spring Suspension		•