


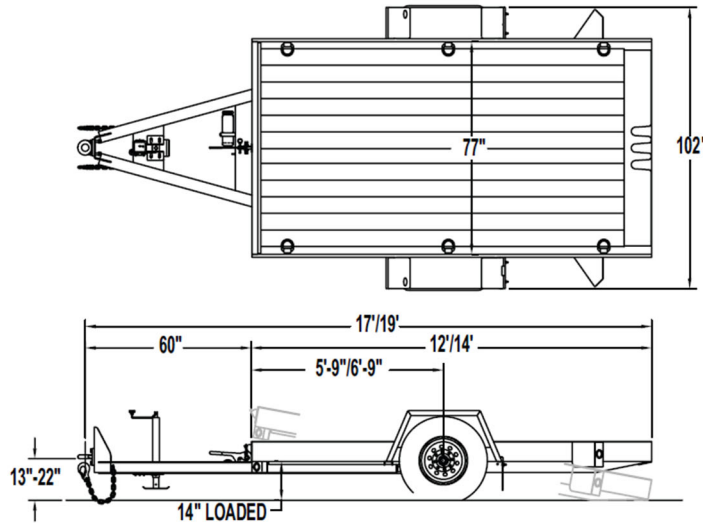

All dimensions are nominal. Illustration may be shown with optional equipment.

Standard Features

Hitch/Tongue

- Adjustable Height Hitch with Bolt-on Coupler
- 2.5" Pintle Ring
- 7-Pole RV Plug
- 7K Bolt-On, Top-Wind Parking Jack
- Battery Break-Away Kit with Tow Charger and Test Light
- Safety Chains with Hooks

Frame/Deck

- 77" Load Width
- 14" Deck Height (Fully Loaded)
- Single-Point Deck Lock
- 4" I-Beam Main Frame
- 3" Jr. I-Beam Crossmembers, 80,000 PSI
- 2" Nominal White Oak Wood Deck
- 7" Tall Sides
- D-Rings (3 Per Side)
- 12 Gauge One-Piece Formed Fender/Panel

Tail/Approach

- 12' Tilt Deck Load Angle 12°
- 14' Tilt Deck Load Angle 10°

Axles/Suspension

- Rubber-Ride Torsion Suspension Axle
- (1) 7,000 lb. Axle (2 Wheels)
- Tires-235/85R16 Load Range F, 12-Ply
- 16" Wheels, 8-Bolt
- Electric Brakes
- Forward Self-Adjusting Brakes
- EZ Lube Hubs

Lights/Wiring

- Rubber Grommet Mounted LED Lights
- Sealed Modular Wiring Harness

Standard Features

- Limited Lifetime Frame Warranty-10 years
- One-Year Full Warranty
- 10 Year Suspension Warranty
- Weatherproof Registration Holder
- Two-Component Polyurethane Primer and Paint
- Trailer Color: Equipment Black

GAWR (lbs.)	GVWR (lbs.)	Weight (lbs.)	Capacity (lbs.)	Deck Width (in.)	Deck Length (ft.)
7,000	8,000	2,000	6,000	77"	12'
7,000	8,230	2,230	6,000	77"	14'

Other Options May Be Available. Ask Your Dealer or Visit our Website.

Listed GVWR, weight and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our website or your local authorized dealer for more information.

Towmaster.com 800-462-4517

Options	T-3DT	T-6DT
TONGUE/HITCH		
Hydraulic Surge Brakes with Free Backing (Check Local D.O.T Laws)	•	•
2-5/16" Ball Coupler	•	•
3" Pintle Ring	•	•
4-Way Flat Electrical Plug	•	•
6-Pole Round Electrical	•	•
7-Pole Round Electrical	•	•
12k Drop-Leg Jack (In Lieu of 7K)	•	•
12k Spring Foot Jack	•	•
MAIN DECK/BEAVERTAIL		
White Oak Decking in Lieu of Steel Deck	•	
Apitong Wood Decking Upgrade	•	•
7-Gauge Steel Deck in Lieu of Wood, with Non-Slip Grit		•
3/16" Diamond Plate Steel Decking. Crossmembers 12" On-Center		•
Two Rubber Runner Traction Aids-8" Wide x Full Length of Deck, Mounted 24" On-Center	•	•
Additional D-Ring Tie-Downs	•	•
Tilt Deck Cushion Cylinder	•	•
SUSPENSION/TIRE AND WHEELS		
Spare Tire Mounting Bracket Mounted on the Curbside of Tongue	•	•
Spare Tire and Wheel ST225/75R15 Load Range "E"	•	
Spare Tire and Wheel 235/85R16 Load Range "F"		•
RAMPS		
3' Star Traction "SL" Ramps. The scissor lift "SL" ramps have a 7° Load Angle, are painted red are mounted on two Ramp Rods and are adjustable. These Ramps replace the Standard Tilt-Deck Knife Edge Approach. The Option includes Auto-Latch Ramp Hold-Ups		•
PAINT/OTHER		
Trailer Color Options: See Standard Color Chart	•	•
Galvanizing-(Please Call for Current Cost)	•	•
Custom Paint Color: Market Price (Please Call for Cost)	•	•
Two Chock Blocks with Holders (Mounted on Front of Fender)	•	•
Change "SL" Ramp Color from Red to Yellow or Blue or Charcoal (No Charge for Black)	•	•