


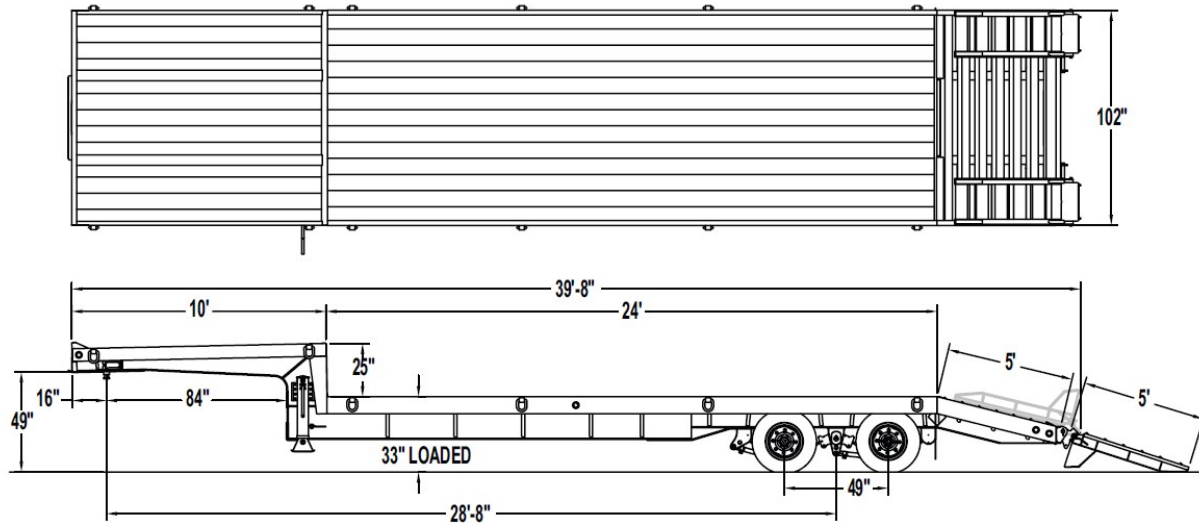

All dimensions are nominal. Illustration may be shown with optional equipment.

Standard Features

Gooseneck

- Rigid Gooseneck
- 84" Swing Clearance (16" King Pin Setting)
- 2" King Pin
- 10' Top Deck
- 2" Nominal White Oak Decking on Top Deck
- D-ring Tie-Downs (2 Per Side on Top Deck)
- Dual 25k Bolt-On Two-Speed Parking Jacks

Main Deck/Frame

- 102" Load Width
- 33" Deck Height (Fully Loaded)
- 24' Main Deck Length
- I-Beam Main Frame
- 3" Jr. I-Beam Crossmembers, 80,000 PSI
- 2" Nominal White Oak Decking
- D-ring Tie-Downs (4 Per Side of Main Deck)

Beavertail/Ramps

- 5' Steel Angle Iron Beavertail (14° Load Angle)
- Beavertail to Deck Transition Wood Protectors
- 5' x 21" Ladder Style Angle Iron Cleated Ramps (14° Load Angle)
- Two-Way Spring Assist Ramps

Axles/Suspension

- Hutchens 9700 Adjustable Suspension
- (2) 25,000 lb. Axles (8 Wheels)
- 49" Axle Spacing
- Tires -235/75R17.5 Load Range J, 18-Ply
- 17.5" Wheels, 8-Bolt, Hub Piloted
- Oil Bath Hubs
- Air Brakes (2S/1M) Full ABS
- Brake Size (12.25 x 7.5)
- Auto Slack Adjusters

Lights/Wiring

- 7 Pole Round Plug
- Rubber Grommet Mounted LED Lights
- Sealed Modular Wiring Harness

Model Features

- Limited Lifetime Frame Warranty - 5 Years
- One-Year Full Warranty
- 5 Year Suspension Warranty
- Weatherproof Registration Holder
- Two-Component Polyurethane Primer and Paint
- Trailer Color: Equipment Black
- Ramp Color: Equipment Red

GAWR (lbs.)	GVWR (lbs.)	Weight (lbs.)	Capacity (lbs.)	Deck Width (in.)	Deck Length (ft.)
45,400	61,300	11,300	50,000	102"	24'

Other Options May Be Available. Ask Your Dealer or Visit our Website.

Listed GVWR, weight and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our website or your local authorized dealer for more information.

Options	T-50RG	T-70RG
GOOSENECK/TOP DECK		
30° Sloped gooseneck	•	•
Double sloped gooseneck (12 ° to 10° transition from main deck to top deck)	•	•
6' Aluminum ramps to load top deck with 17° load angle—Shipped loose (Price per pair of ramps)	•	•
Ramp storage for aluminum top deck ramps (Mounted under the top deck)	•	•
Integrated dual storage trays with lockable lids	•	•
JACK		
Dual 25K Electric/hydraulic jacks	•	•
MAIN DECK		
Additional deck length up to 34' (Per linear foot) - Over 34' please contact Towmaster for pricing	•	•
Out of jig charge for over 4' of added deck	•	•
2" Apitong wood deck boards in place of standard white oak	•	•
Diamond plate steel decking ILO white Oak (Per linear foot)	•	•
Trailer step mounted in front of the axle under the main deck (Per step)	•	•
Retractable trailer step mounted in front of the axle under the main deck (Per step)	•	•
9' (108") overall width ILO 8'-6" (102") overall width - May be subject to permitting. (Per linear foot)	•	•
BEAVERTAIL		
5'-0" Wood Filled Beavertail ILO standard 5'-0" cleated style beavertail)	•	•
5'-6" Cleated style beavertail for use with 4' 6" wedge style ramps (Wedge style ramps sold separately)	•	•
6'-0" Cleated style beavertail	•	•
6'-0" Wood filled beavertail	•	•
7'-6" Double break, cleated style beavertail with 12° to 6° to flat deck load angle and includes 6' cleated style ramps with spring-assist	•	•
7'-6" Double break, wood filled beavertail with 12° to 6° to flat deck load angle and includes 6' cleated style ramps with spring-assist	•	•
Bucket well in beavertail	•	•
Deduct for no beavertail	•	•
RAMPS		
Third manual ramp	•	•
5' Wood filled ramps	•	•
6' Cleated style ramps	•	•
6'-0" Wood filled ramps	•	•
4'-6" Wedge style ramps with angle iron (Must Select 5'-6" Cleated Style Beavertail Option)	•	•
6' x 36" Air operated cleated style ramps	•	•
6' x 36" Air operated wood filled ramps	•	•
6' x 36" Electric/hydraulic cleated style ramps	•	•

Options	T-50RG	T-70RG
RAMPS-continued		
6' x 36" Electric/hydraulic wood filled ramps	•	•
6' x 48" Air operated cleated style ramps	•	•
6' x 48" Air operated wood filled ramps	•	•
6' x 48" Electric/hydraulic cleated style ramps	•	•
6' x 48" Electric/hydraulic wood filled ramps	•	•
7' x 36" Air operated cleated style ramps	•	•
7' x 36" Air operated wood filled ramps	•	•
7' x 36" Electric/hydraulic cleated style ramps	•	•
7' x 36" Electric/hydraulic wood filled ramps	•	•
7' x 48" Electric/hydraulic cleated style ramps	•	•
7' x 48" Electric/hydraulic wood filled ramps	•	•
8' x 36" Electric/hydraulic cleated style ramps	•	•
8' x 36" Electric/hydraulic wood filled ramps	•	•
8' x 48" Electric/hydraulic cleated style ramps	•	•
8' x 48" Electric/hydraulic wood filled ramps	•	•
11' x 102' Bi-fold electric/hydraulic wood topped ramp (6' Wood topped beavertail is required)	•	•
Deduct for no ramps	•	•
TIE DOWNS		
Additional D-rings (Per D-ring)	•	•
Rub Rail & Stake Pockets ILO D-rings (Per linear foot)	•	•
Stake Pockets in addition to D-rings (Per stake pocket)	•	•
Stake Pockets ILO D-rings—Rub rail not included (Per stake pocket)	•	•
Recessed D-rings in decking (Per Recessed D-ring)	•	•
Sliding winch rail mounted on curbside (Priced per foot)	•	•
4" Sliding winch for winch rail (Per sliding winch)	•	•
4" Weld-on winch mounted on curbside (Per weld-on winch)	•	•
4" x 30' Cargo straps with flat hooks (Per cargo strap)	•	•
Two-way chain slot cutouts in outer rails (Per chain slot)	•	•
Four-way chain slot cutouts cut into a formed channel down the center of the trailer (per chain slot)	•	•
AXLES/SUSPENSION		
55" axle Spacing ILO 49" axle spacing	•	•
60" axle spacing ILO 49" axle spacing	•	•
Additional 25k oil bath, spring axle with Hutchens 9700 suspension	•	•
25k Air ride suspension tandem axle upgrade: Oil bath axle with 49" axle spacing & dump valve (Raises deck height 1.5" versus spring suspension.)	•	•
Additional 25k oil bath, air ride suspension axle with dump valve	•	•
Lift Axle -air ride & air lift (requires three axles minimum)	•	•
Hubodometer mounted on the roadside rear axle hub to measure distance traveled (priced per meter)	•	•
Air-Weigh digital on-board trailer scale (measure & monitor the weight of the load on the trailer in real time)	•	•
Pressure Systems International (P.S.I.) Tire Inflation System (Automatically Monitors & Adjusts Tire Pressure) Per axle	•	•

Options	T-50RG	T-70RG
BRAKES		
Air Brakes, 4S/2M ABS ILO 2S/1M ABS	•	•
TIRES/WHEELS		
Spare tire & wheel 235/75Rx17.5 Load Range "J", 18-Ply (Per tire & wheel)	•	•
Spare tire & wheel 255/70R X 22.5, Load Range "H", 16-Ply (Per tire & wheel)	•	•
Spare tire carrier mounted under main deck (Lockable)	•	•
Spare tire mounting bracket on gooseneck top deck	•	•
Polished aluminum wheel, 8-bolt, outboard, hub piloted (Per wheel)	•	•
ELECTRICAL/WINCH		
LED Strobe Light Kit (Switched & mounted)	•	•
Flasher kit for marker lights with battery pack	•	•
Mid-ship LED turn/marker lights (One on curbside and one on roadside of trailer)	•	•
12k Electric winch with 125' of 3/8" cable, corded remote & wired to the headboard of the gooseneck	•	•
Battery for electric winch	•	•
Battery kit & charger for bi-fold ramp	•	•
Battery kit & charger for electric/hydraulic ramps	•	•
PAINT/OTHER		
Trailer Color Options: See standard color chart on page 7	•	•
Custom Paint Color: Market price—Please call for cost	•	•
Change ramp color from Red to Yellow, Blue or Charcoal (No charge for black)	•	•
Two chock blocks with holders—Mounted under deck between the axles	•	•
Aluminum Toolbox (18" x 18" x 48") – Mounted Under Deck (Price Per Toolbox)	•	•